


Fixed installation for input unit Primor RO (Wittkopp)

(Installation for Motor locks)

1. Mount baseplate on Safe Door
2. Place the input unit into baseplate
3. Mark the point for threaded hole
4. Cut thread
5. grub screw mount, now it is fixed

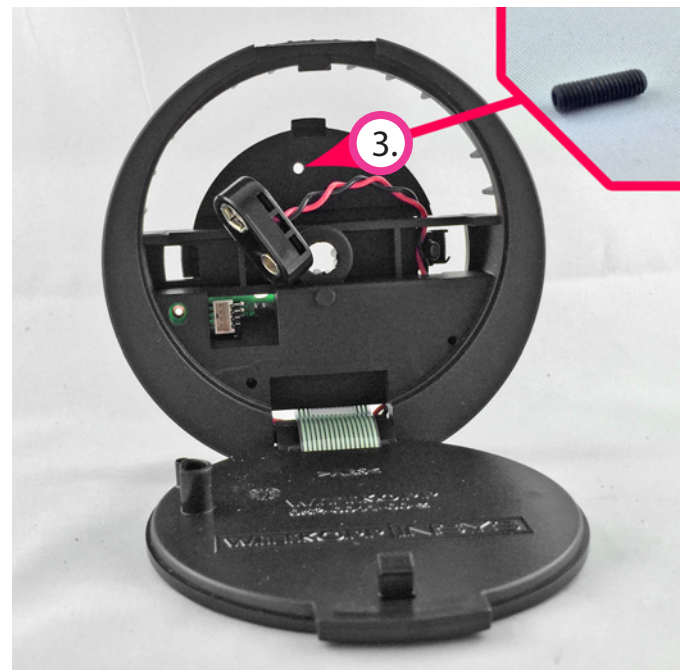

Kundendienst



CLAVIS Deutschland GmbH
Grüner Weg 38
34117 Kassel

Telefon: +49 (0)561 988 499-0

E-Mail: info@tresore.eu

Internet: www.tresore.eu

www.tresorschloss.de